



NOTE:

THE MAXIMUM PERMISSIBLE PROJECTION FROM THE GROUNDLINE TO THE BREAKAWAY LOCATION SHALL BE 4". WHERE NECESSARY, THE SHADED AREA OF THE FOOTING SHALL BE REMOVED AND REINFORCEMENT SHALL BE BENT TO FIT.

FOUNDATION DETAIL

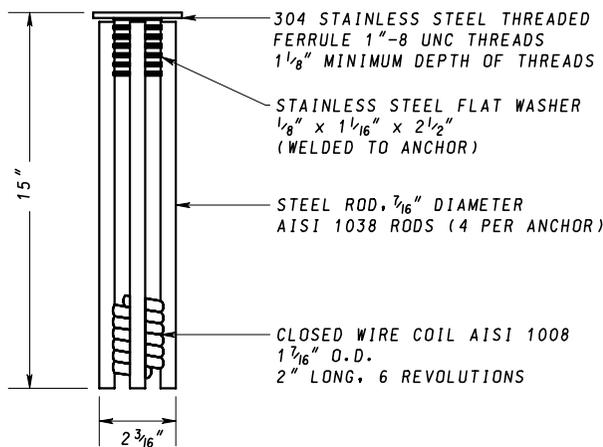

FEMALE ANCHOR DETAIL

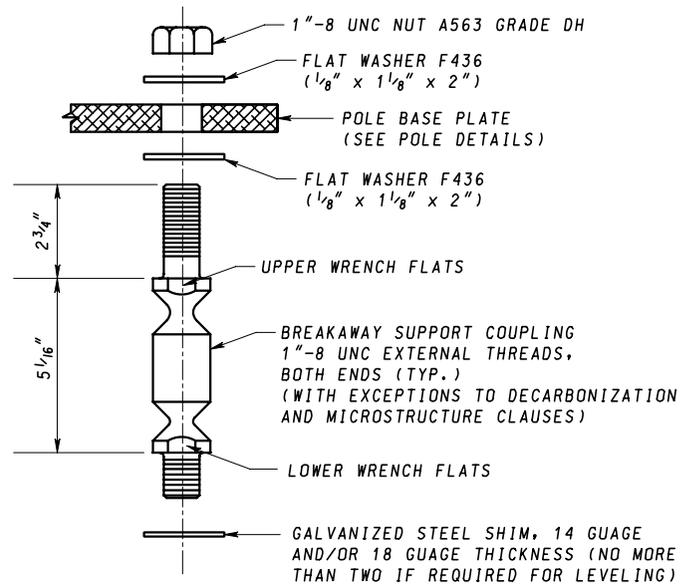

BREAKAWAY COUPLING DETAIL

SPECIFICATION 818	CATEGORY CODE ITEMS	
APPROVED		
	DIRECTOR - OFFICE OF TRAFFIC AND SAFETY	
	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL 5-17-07	APPROVAL 5-2-07
	REVISED	REVISED
	REVISED	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
SIGNAL STRUCTURE FOUNDATIONS FOR
PUSHBUTTON AND PEDESTRIAN SIGNAL POLE

STANDARD NO. MD 801.01-01